
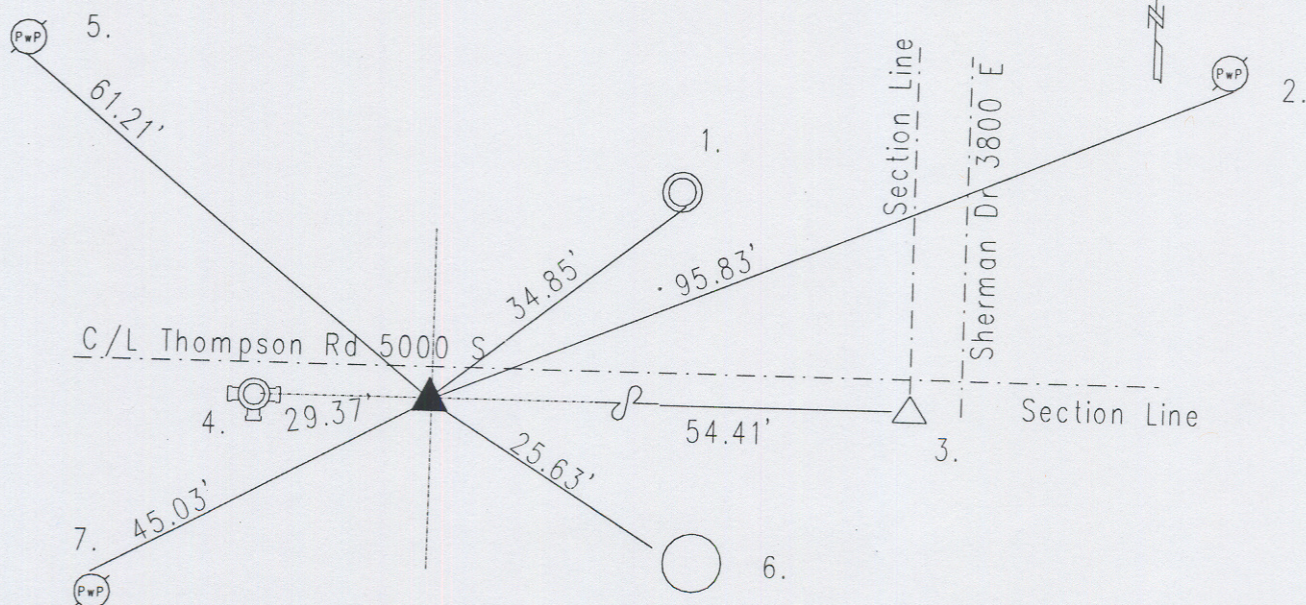


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 4 TOWNSHIP 14 RANGE 4
DATE: 08-22-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-25-2000

IN. S.P.C. E ZONE, NAD 83
NAME: 14040401
N: 493648.2370(m)
E: 62697.6640(m)

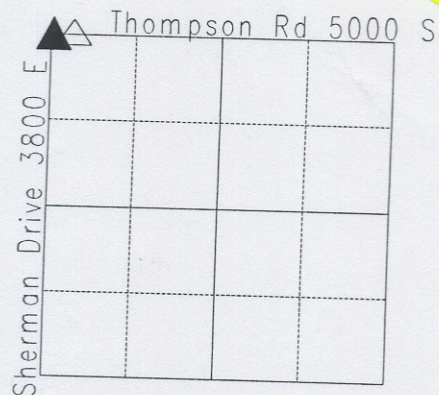

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" ash bearing south 40 degrees, thence west 21 links; and a 8" hickory bearing north 63 degrees, thence west 20 links. (M.C. Atlas) A survey by H. B. Fatout on April 26, 1851 indicates no stone or witnesses. (Perry Legal Book p. 31) Corner referenced by Wilcoxon on 11/7/75 and called a iron pin. Corner referenced by Wilcoxon on 3/31/76 and called a iron pin. Corner referenced by Greene on 5/22/87 and called a iron pin. Corner excavated by Greene on 8/8/90 and a 1" iron pin was found @ surface. A 2" iron pin was found 12" down. No stone or other monuments were found. A #205 cast iron Harrison Monument was set in position as the corner. Corner referenced by Whiteside on 11/18/95 and called a Harrison. Corner referenced by Wilcoxon on 4/25/2000 and called a Harrison. Corner excavated by Wilcoxon on 8/20/04 and a #205 cast iron Harrison monument was set per ties and GPS for construction.

REF.	DISTANCE	DESCRIPTION
1.	34.85'	Cut 'x' S-rim of manhole
2.	95.83'	PK nail w/shiner S PwP no# 12"up
3.	54.41'	Due E to SW 33-15-4 Harrison
4.	29.37'	Due W to top of fire hydrant
5.	61.21'	Road nail S PwP no# 8"up
6.	25.63'	Boat spike W honey locus 12"up
7.	45.03'	PK nail N pwP339-701 B at ground